


PLUTONE A




Tubo trasparente in PVC, rinforzato con spirale in acciaio.

- Trasporto in aspirazione e mandata di liquidi alimentari, bevande, succhi di frutta, aceto, vino e liquori con concentrazione alcolica fino a 20%.
- Idoneo al trasporto di alimenti secondo il regolamento Europeo UE 10/2011 (classi A, B, C). Viene inoltre impiegato su macchine riempitrici e dosatrici.

Transparent PVC hose reinforced with a steel spiral. Inside and outside completely black with a blue stripe. Resistant to most chemicals and weather agents.

- *Ideal solution for suction and delivery of food liquids, beverages, fruit juices, wine and liquors with up to 20% alcohol concentration. It is often used for filling machines and dispensers. Suitable to deliver foodstuffs according to Reg. EU 10/2011 (classes A, B, C)*

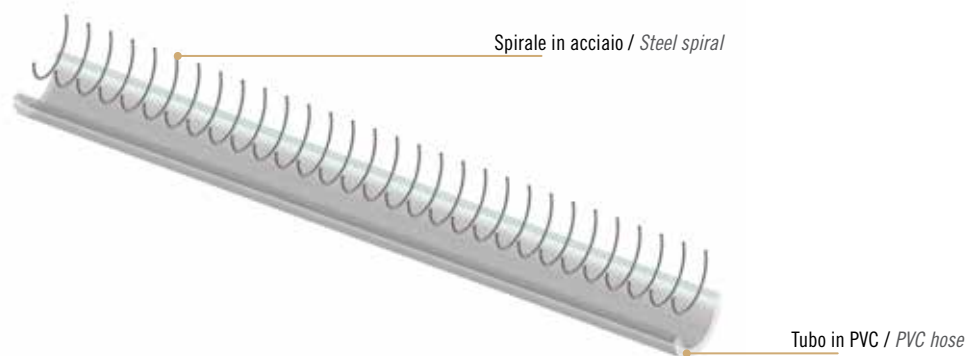

Scheda tecnica / Technical data

Codice	Ø Int.	Ø Est.	Peso	P.E.	P.S.	Depr.	R. Curvatura	Lg. Rotolo	Vol.
Code	Ins. Ø	Out Ø	Weight	WP	BP	Vac.	Bending	Coil lgth.	Vol.
	mm	mm	g/m	bar	bar	m H ₂ O	mm	m	m ³
PY 01 006.0 012.2	6	12,2	130	5,0	25	9,5	30	60	0,019
PY 01 008.0 014.2	8	14,2	155	5,0	25	9,5	40	60	0,022
PY 01 010.0 016.0	10	16	175	5,0	25	9,5	50	60	0,028
PY 01 012.0 018.0	12	18	200	5,0	25	9,5	50	60	0,033
PY 01 014.0 020.0	14	20	230	5,0	25	9,5	60	60	0,039
PY 01 016.0 022.4	16	22,4	270	5,0	25	9,5	70	60	0,048
PY 01 018.0 024.4	18	24,4	295	5,0	25	9,5	80	60	0,067
PY 01 020.0 027.0	20	27	355	5,0	25	9,5	90	60	0,082
PY 01 022.0 029.0	22	29	385	5,0	25	9,5	100	60	0,093
PY 01 025.0 033.0	25	33	510	4,0	20	9,5	110	60	0,111
PY 01 030.0 038.0	30	38	595	4,0	20	8,5	140	60	0,151
PY 01 032.0 040.4	32	40,4	655	4,0	20	8,5	140	60	0,171
PY 01 035.0 043.4	35	43,4	710	4,0	20	8,5	160	60	0,188
PY 01 038.0 047.0	38	47	810	4,0	20	8,5	170	30	0,114
PY 01 040.0 049.0	40	49	880	4,0	20	8,5	180	30	0,125
PY 01 045.0 054.8	45	54,8	1115	4,0	20	8	200	30	0,178
PY 01 050.0 060.0	50	60	1250	4,0	20	8	230	30	0,210
PY 01 060.0 071.8	60	71,8	1725	3,6	18	8	270	30	0,285
PY 01 063.0 074.8	63	74,8	1825	3,6	18	8	280	30	0,281
PY 01 070.0 082.0	70	82	2030	3,6	18	7	320	30	0,342
PY 01 076.0 088.2	76	88,2	2230	3,6	18	7	340	30	0,489
PY 01 080.0 092.2	80	92,2	2385	3,6	18	7	360	20	0,357
PY 01 090.0 103.0	90	103	3040	3,0	15	7	410	20	0,415
PY 01 102.0 115.0	102	115	3395	2,4	12	7	460	20	0,517
PY 01 105.0 118.0	105*	118	3495	2,4	12	7	470	20	0,531
PY 01 110.0 127.4	110	127,4	4860	1,6	8	9,0	550	20	0,612
PY 01 120.0 137.4	120	137,4	5270	1,2	6	9,0	600	20	0,686
PY 01 127.0 144.4	127	144,4	5570	1,2	6	9,0	640	20	0,739
PY 01 150.0 168.6	151	168,6	6990	1,2	6	9,0	760	20	1,303

*Disponibile su richiesta, per quantitativi da concordare con l'ufficio vendite / *Available on request, contact our sales office for more info and quantities

I dati tecnici qui riportati sono stati misurati a 23°C e al 50% di umidità / The technical data here reported were measured at 23°C with 50% humidity