


# SPIRALPRESS WT




Tubo trasparente in PVC-P con spirale in PVC rigido di colore arancione e rinforzo tessile. Interno liscio ed esterno corrugato. La parete trasparente favorisce una migliore identificazione delle sostanze trasportate mentre la spirale sporgente consente un minor attrito durante le operazioni di trascinamento. Il rinforzo tessile consente altresì una maggiore resistenza alla pressione. Leggero e maneggevole, il tubo si presta ad applicazioni che richiedono una buona resistenza a pressioni elevate. Spiralina disponibile.

- Soluzione ideale per l'aspirazione e mandata di acqua, anche a pressioni elevate e in condizioni severe, nei sistemi di pompaggio e di water discharge.

*Transparent hose made by plasticized vinyl compound with an orange anti-shock rigid PVC spiral and textile reinforcement. Completely smooth inside and with an external PVC corrugated helix. The clear wall is intended to easily detect the media transported as well as its exposed spiral allows less resistance to dragging. The textile braid reinforcement enhances a higher working pressure. Light and easy to handle, the hose is suitable for applications where a good resistance to high pressures is required. Banding coil available.*

- *Excellent solution for suction and discharge of water, conceived to resist at the highest pressures, even in severe conditions.*

*The larger sizes are ideally suited for fish handling and on rental pumping systems.*

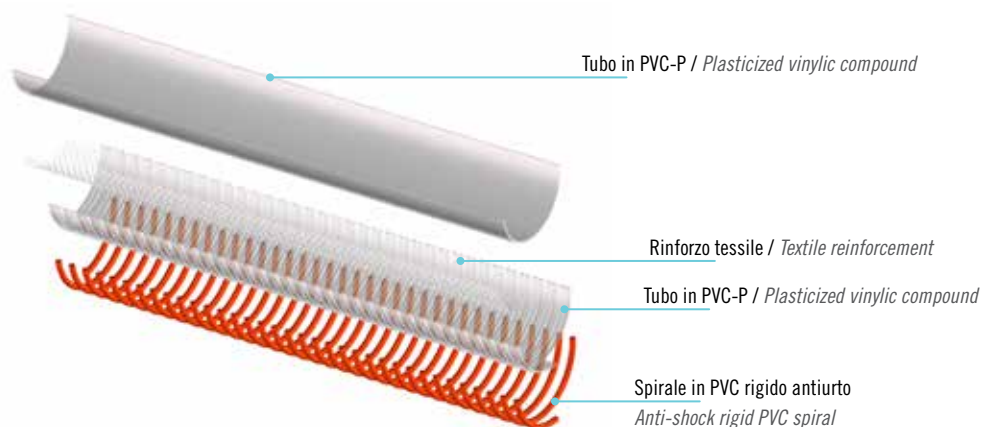

## Scheda tecnica / Technical data

Codice	Ø Int.	Ø Est.	Spess. Min.	Spess. Max.	Peso	Passo	P.E.	Depr.	R. Curvatura	Lg. Rotolo	Lg. Spirulina
Code	Ins. Ø	Out Ø	Min wall th.	Max. wall th.	Weight	Pitch	WP	Vac.	Bending	Coil Lgth.	Banding coil Lgth.
	mm	mm	mm	mm	g/m	mm	bar	m H <sub>2</sub> O	mm	m	m <sup>3</sup>
WT010380000000	38,1	51,5	3,0	6,7	740	9	10	9,5	140	30	153
WT010400000000	40	53,3	3,0	6,7	750	10	8	9,5	150	30	152
WT010500000000	50	65,4	3,0	7,7	1100	10	7	9,5	230	30	179,1
WT010508000000	50,8	66,2	3,0	7,7	1120	10	7	9,5	240	30	179,1
WT010600000000	60	76,8	3,0	8,4	1250	14	7	9,5	300	30	202,3
WT010760000000	76,2	95,7	3,5	9,8	1910	15	6	9,0	380	30	225
WT010800000000	80	100,7	3,5	10,3	2190	15	6	9,0	400	30	225
WT011000000000	100	120,8	3,5	10,4	2620	16	6	9,0	500	30	240
WT011020000000	101,6	122,6	3,5	10,5	2650	16	6	9,0	520	30	240
WT011270000000	127	151,9	5,0	12,5	4000	19,5	5	9,0	650	30	292,5
WT011520000000	152,4	182,5	5,0	15,0	5900	21,5	5	8,0	800	20	322,5
WT012030000000	203,2	236,0	6,0	16,4	8350	25	4	8,0	1000	10	375

\*Disponibile su richiesta, per quantitativi da concordare con l'ufficio vendite / \*Available on request, contact our sales office for more info and quantities

I dati tecnici qui riportati sono stati misurati a 23°C e al 50% di umidità / The technical data here reported were measured at 23°C with 50% humidity