

EOLO PUP EST




Tubo trasparente in poliuretano base estere, con spirale di rinforzo in PVC rigido antiurto di color grigio scuro; superficie interna perfettamente liscia, esterno corrugato; notevole resistenza all'abrasione e alla flessione. Spessore di parete da 0,8 mm a 1,00 mm. Versione antistatica con cordicella di rame su richiesta.

- Trasporto di trucioli e granulati abrasivi; industria delle materie plastiche, ceramica, industria della lavorazione del legno.

Transparent ester based Polyurethane hose, reinforced with a dark grey anti-shock PVC spiral. Completely smooth bore, corrugated outside; really good resistance to abrasion and torsion. Wall thickness from 0,8 mm to 1,0 mm. Antistatic version with copper wire on request.

- Suction and transport of abrasive media such as powders, pellets, granulates, fibres and dust. It finds optimal application in the plastic, woodworking and ceramic industries and when a very good abrasion resistance is required.

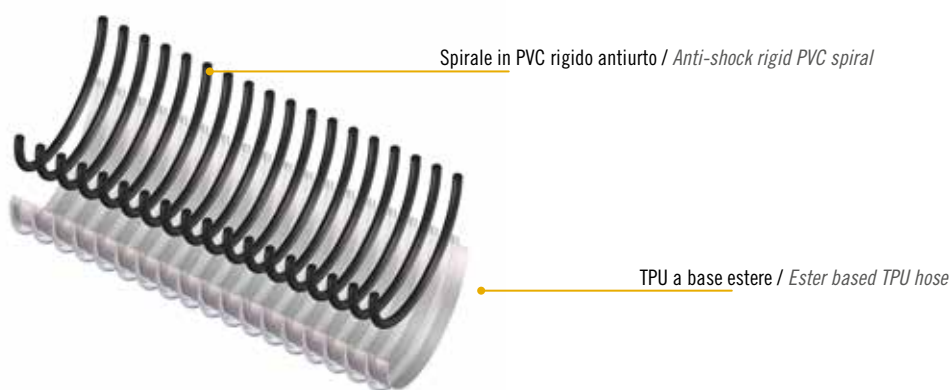

Spirale in PVC rigido antiurto / Anti-shock rigid PVC spiral

TPU a base estere / Ester based TPU hose

Scheda tecnica / Technical data

Codice	Ø Int.	Spess. Min.	Spess. Max.	Peso	R. Curvatura	Depr.	Lg. Rotolo	Vol.
Code	Ø Int.	Min wall th.	Max wall th.	Weight	Bending	Vac.	Coil lgth.	Vol.
	mm	mm	mm	g/m	mm	m H ₂ O	m	m ³
OP 01 030.0 000.0	30*	0,8	3,3	250	100	3,5	30	0,070
OP 01 032.0 000.0	32*	0,8	3,3	260	110	3	30	0,074
OP 01 035.0 000.0	35*	0,8	3,5	290	120	3	30	0,081
OP 01 038.0 000.0	38,1	0,8	3,5	310	130	3	30	0,087
OP 01 040.0 000.0	40	1,0	3,5	360	140	3	30	0,121
OP 01 045.0 000.0	45	1,0	3,8	450	160	3	30	0,135
OP 01 052.0 000.0	50,8	1,0	4,3	560	175	3	30	0,171
OP 01 060.0 000.0	60	1,0	4,3	650	200	3	30	0,296
OP 01 063.0 000.0	63,5	1,0	4,2	690	230	3	30	0,311
OP 01 065.0 000.0	65*	1,0	4,2	700	230	3	30	0,318
OP 01 070.0 000.0	70	1,0	4,7	760	250	3	30	0,344
OP 01 076.0 000.0	76,2	1,0	4,7	830	270	2,5	30	0,371
OP 01 080.0 000.0	80	1,0	5,2	910	290	2,5	30	0,391
OP 01 090.0 000.0	90	1,0	5,3	1080	360	2,5	30	0,581
OP 01 100.0 000.0	100	1,0	5,8	1260	400	2,5	30	0,644
OP 01 102.0 000.0	102	1,0	5,8	1290	400	2,5	30	0,655
OP 01 110.0 000.0	110*	1,0	6,0	1400	440	2,5	30	0,704
OP 01 120.0 000.0	120	1,0	6,0	1520	470	2,5	30	1,015
OP 01 127.0 000.0	127*	1,0	6,0	1610	500	2,5	30	1,069
OP 01 130.0 000.0	130*	1,0	6,1	1640	520	2,5	30	1,092
OP 01 140.0 000.0	140*	1,0	6,1	1810	570	2	30	1,561
OP 01 150.0 000.0	151,5*	1,0	6,5	2010	600	2	20	1,265
OP 01 152.0 000.0	152,8*	1,0	6,6	2030	600	2	20	1,272

*Disponibile su richiesta, per quantitativi da concordare con l'ufficio vendite / *Available on request, contact our sales office for more info and quantities

I dati tecnici qui riportati sono stati misurati a 23°C e al 50% di umidità / The technical data here reported were measured at 23°C with 50% humidity