


EOLO SE




Tubo in PVC plastificato di colore blu, con spirale di rinforzo in PVC rigido antiurto. Superficie interna liscia, esterna corrugata. Molto flessibile soprattutto alle basse temperature, alta resistenza meccanica. Versione antistatica con cordicella di rame su richiesta.

- Ventilazione e condizionamento industriale: aspirazione di aria, fumi e gas; aspiratori domestici.

Blue super elastic plasticized PVC hose reinforced with rigid anti-shock PVC spiral. Inside smooth, outside corrugated. Particularly flexible at low temperatures, high mechanical resistance. Antistatic version with copper wire on request.

- Industrial and domestic vacuum cleaners, air conditioning plants and suction of fumes, gases.

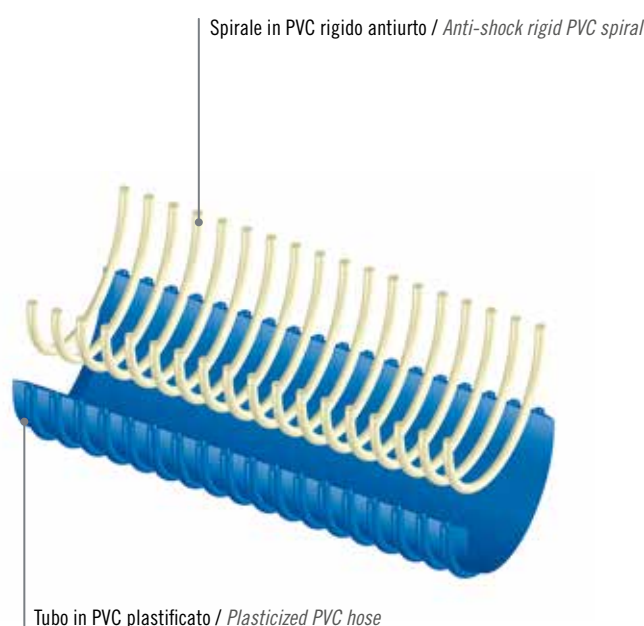

Spirale in PVC rigido antiurto / Anti-shock rigid PVC spiral

Tubo in PVC plastificato / Plasticized PVC hose

Scheda tecnica / Technical data

Codice	Ø Int.	Spess. Min.	Spess. Max.	Peso	R. Curvatura	Depr.	Lg. Rotolo	Vol.
Code	Ins. Ø	Min wall th.	Max wall th.	Weight	Bending	Vac.	Coil lgth.	Vol.
	mm	mm	mm	g/m	mm	m H ₂ O	m	m ³
EE 01 025.0 000.0	25*	1,2	2,6	170	80	6	50	0,037
EE 01 030.0 000.0	30*	1,4	3,0	250	100	6	50	0,115
EE 01 032.0 000.0	31,8*	1,4	3,1	280	110	6	50	0,122
EE 01 038.0 000.0	38,1*	1,5	3,2	330	130	5	50	0,142
EE 01 050.0 000.0	50*	1,6	3,9	530	175	5	50	0,259
EE 01 052.0 000.0	50,8*	1,6	3,9	540	175	5	50	0,263
EE 01 063.0 000.0	63,5*	2,0	4,6	860	220	5	50	0,419
EE 01 076.0 000.0	76,2*	2,0	5,2	1070	270	5	50	0,624
EE 01 102.0 000.0	102*	2,1	5,6	1420	400	4,5	30	0,652
EE 01 127.0 000.0	127*	2,2	6,5	2070	500	4,5	30	1,075
EE 01 150.0 000.0	151,5*	2,5	7,3	2820	600	4	20	1,276
EE 01 152.0 000.0	152,4*	2,5	7,4	2880	600	4	20	1,284
EE 01 200.0 000.0	200*	2,7	8,0	3670	800	3,5	20	1,728
EE 01 203.0 000.0	203,2*	2,7	8,0	3730	800	3,5	20	1,754
EE 01 250.0 000.0	250*	2,8	8,4	4890	1250	3	10	2,134

*Disponibile su richiesta, per quantitativi da concordare con l'ufficio vendite / *Available on request, contact our sales office for more info and quantities

I dati tecnici qui riportati sono stati misurati a 23°C e al 50% di umidità / The technical data here reported were measured at 23°C with 50% humidity