


NETTUNO PU FF



Tubo trasparente in PVC, sottostrato in poliuretano a base etere e spirale di rinforzo color avorio; completamente liscio internamente, leggero e molto flessibile. Resistente ad idrolisi. Versione antistatica con cordicella di rame su richiesta.


• **Industria alimentare:** aspirazione e mandata di polveri alimentari come farine, cibi liofilizzati, granaglie di piccole dimensioni. Beverage industry: passaggio bevande con concentrazione alcolica fino al 20%.

Idoneo al trasporto di alimenti secondo il regolamento europeo UE 10/2011 (classi A, B, C).

Transparent PVC hose with an ether based Polyurethane liner, reinforced with an ivory anti-shock rigid PVC spiral; completely smooth inside, light and very flexible. Antistatic version with copper wire on request.

• Ideal solution for suction and delivery of food powders like flours, light grains, freeze dried foodstuffs. For beverages with alcohol concentration up to 20%.

Food grade according to EU Regulation n° 10/2011 (classes A, B, C).

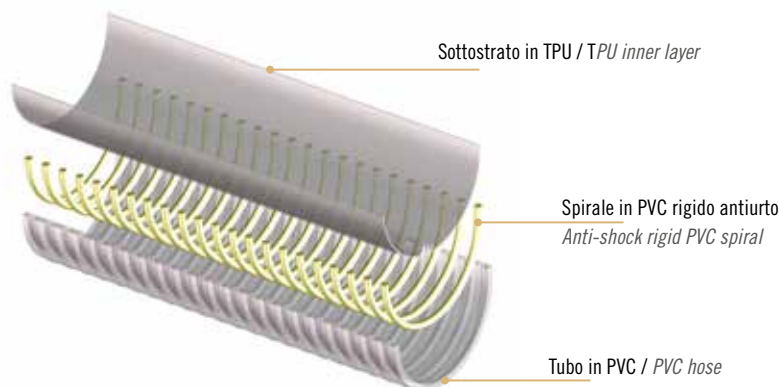

Scheda tecnica / Technical data

Codice	Ø Int.	Spess. Min.	Spess. Max.	Peso	P.E.	P.S.	Depr.	R. Curvatura	Lg. Rotolo	Vol.
Code	Ins. Ø	Min wall th.	Max. wall th.	Weight	WP	BP	Vac.	Bending	Coil lgth.	Vol.
	mm	mm	mm	g/m	bar	bar	m H ₂ O	mm	m	m ³
NR 01 030.0 000.0	30*	2,8	3,3	380	5	15	7	150	30	0,071
NR 01 032.0 000.0	31,8	2,9	3,4	420	5	15	7	155	30	0,100
NR 01 035.0 000.0	35*	3,0	3,5	470	5	15	7	170	30	0,109
NR 01 038.0 000.0	38,1	3,1	3,7	530	5	15	7	185	30	0,118
NR 01 040.0 000.0	40	3,1	3,8	560	5	15	7	195	30	0,123
NR 01 045.0 000.0	45*	3,1	4,1	660	5	15	7	215	30	0,172
NR 01 050.0 000.0	50	3,3	4,5	790	5	15	7	235	30	0,171
NR 01 052.0 000.0	50,8	3,3	4,5	800	5	15	7	235	30	0,173
NR 01 055.0 000.0	55*	3,4	4,6	890	5	15	7	255	30	0,279
NR 01 060.0 000.0	60	3,4	4,6	970	5	15	7	275	30	0,301
NR 01 063.0 000.0	63,5	3,5	4,6	1040	5	15	7	290	30	0,316
NR 01 070.0 000.0	70*	3,7	4,9	1180	5	15	7	320	30	0,346
NR 01 076.0 000.0	76,2	3,9	5,2	1380	5	15	7	340	30	0,626
NR 01 080.0 000.0	80*	4,1	5,5	1510	4	12	7	365	30	0,658
NR 01 090.0 000.0	90*	4,4	5,8	1830	4	12	7	420	30	0,783
NR 01 100.0 000.0	100*	4,7	6,3	2170	4	12	7	470	30	0,868
NR 01 102.0 000.0	102	4,7	6,3	2210	4	12	7	470	30	0,883

*Disponibile su richiesta, per quantitativi da concordare con l'ufficio vendite / *Available on request, contact our sales office for more info and quantities

I dati tecnici qui riportati sono stati misurati a 23°C e al 50% di umidità / The technical data here reported were measured at 23°C with 50% humidity