




# PLUTONE A SE




Tubo trasparente in PVC rinforzato con spirale in acciaio. Elevata flessibilità.

- Trasporto in aspirazione e mandata di liquidi alimentari, bevande, succhi di frutta, aceto, vino e liquori con concentrazione alcolica fino a 20%.
- Idoneo al trasporto di alimenti secondo il regolamento Europeo UE 10/2011 (classi A, B, C). Viene inoltre impiegato su macchine riempitrici e dosatrici.

*Super flexible transparent hose, produced with PVC and reinforced with steel spiral.*

- *Ideal solution for suction and delivery of food liquids, beverages, fruit juices, wine and liquors with up to 20% alcohol concentration. It is often used for filling machines and dispensers.*
- Suitable to deliver foodstuffs according to Reg. EU 10/2011 (classes A, B, C).*

Spirale in acciaio / Steel spiral

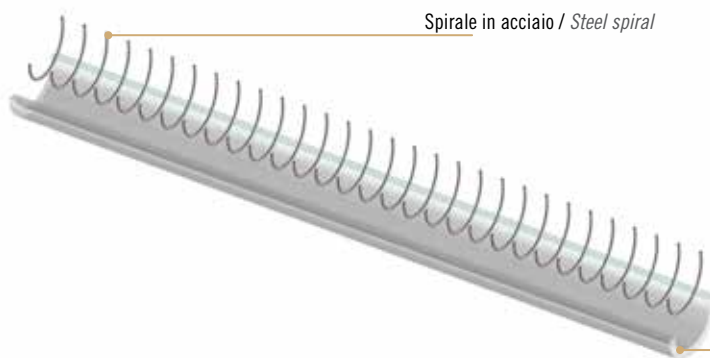

Tubo in PVC / PVC hose

Scheda tecnica / Technical data

Codice	Ø Int.	Ø Est.	Peso	P.E.	P.S.	Depr.	R. Curvatura	Lg. Rotolo	Vol.
Code	Ins. Ø	Out Ø	Weight	WP	BP	Vac.	Bending	Coil lgth.	Vol.
	mm	mm	g/m	bar	bar	m H <sub>2</sub> O	mm	m	m <sup>3</sup>
PY 06 006.0 012.2	6	12,2	130	4,0	20	9,5	20	60	0,019
PY 06 008.0 014.2	8	14,2	150	4,0	20	9,5	30	60	0,022
PY 06 010.0 016.0	10	16	170	4,0	20	9,5	40	60	0,028
PY 06 012.0 018.0	12	18	195	4,0	20	9,5	40	60	0,033
PY 06 014.0 020.0	14	20	225	4,0	20	9,5	50	60	0,039
PY 06 016.0 022.4	16	22,4	265	4,0	20	9,5	60	60	0,048
PY 06 018.0 024.4	18	24,4	290	4,0	20	9,5	60	60	0,067
PY 06 020.0 027.0	20	27	350	4,0	20	9,5	70	60	0,082
PY 06 022.0 029.0	22	29	375	4,0	20	9,5	80	60	0,093
PY 06 025.0 033.0	25	33	495	3,0	15	9,5	90	60	0,111
PY 06 030.0 038.0	30	38	585	3,0	15	8,5	110	60	0,151
PY 06 032.0 040.4	32	40,4	640	3,0	15	8,5	110	60	0,171
PY 06 035.0 043.4	35	43,4	695	3,0	15	8,5	120	60	0,188
PY 06 038.0 047.0	38	47	790	3,0	15	8,5	130	30	0,114
PY 06 040.0 049.0	40	49	860	3,0	15	8,5	140	30	0,125
PY 06 045.0 054.8	45	54,8	1095	3,0	15	8,0	160	30	0,178
PY 06 050.0 060.0	50	60	1225	3,0	15	8,0	180	30	0,210
PY 06 060.0 071.8	60	71,8	1685	2,5	12	8,0	210	30	0,285
PY 06 063.0 074.8	63	74,8	1785	2,5	12	8,0	220	30	0,281
PY 06 070.0 082.0	70	82	1990	2,5	12	7,0	250	30	0,342
PY 06 076.0 088.2	76	88,2	2185	2,5	12	7,0	270	30	0,489
PY 06 080.0 092.2	80	92,2	2335	2,5	12	7,0	280	20	0,357
PY 06 090.0 103.0	90	103	2980	2,0	10	7,0	360	20	0,415
PY 06 102.0 115.0	102	115	3330	1,5	8	7,0	410	20	0,517
PY 06 105.0 118.0	105*	118	3430	1,5	8	7,0	420	20	0,531
PY 06 110.0 127.4	110	127,4	4770	1,0	5	9,0	500	20	0,612
PY 06 120.0 137.4	120	137,4	5170	0,5	3	9,0	540	20	0,686
PY 06 127.0 144.4	127	144,4	5465	0,5	3	9,0	570	20	0,739
PY 06 150.0 168.6	151	168,6	6855	0,5	3	9,0	680	20	1,303

\*Disponibile su richiesta, per quantitativi da concordare con l'ufficio vendite / \*Available on request, contact our sales office for more info and quantities

I dati tecnici qui riportati sono stati misurati a 23°C e al 50% di umidità / The technical data here reported were measured at 23°C with 50% humidity