

ABRAZADERAS DOBLE PUENTE W2

DOUBLE BRIDGE W2



ES Banda de acero inox 430, tornillos de acero galvanizado con tratamiento de galvanización blanca trivalente, exento de cromo VI (según Dir. EU RoHS). Banda con cajón plegable que garantiza una extrema versabilidad y rapidez en el utilizzo, especialmente en tubos de gran diámetro. La banda es completamente dentada con bordes redondeados para proteger los tubos de posibles daños.

- Instalaciones de acondicionamiento, ventilación y aspiración.

EN 430 SS band and housing, RoHS compliant zinc plated screw. Tilting housing worm-drive clamps guarantee versatile and quick application especially on large diameter hoses. The toothed band and bevelled edges protect the hose from damages.

- Air conditioning, ventilation systems and suction plants

CÓD. F2 W2

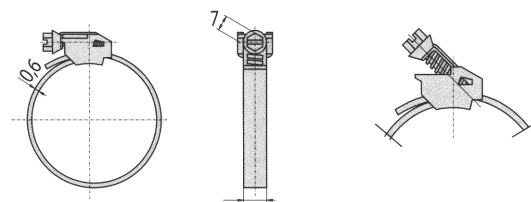

FICHA TÉCNICA · TECHNICAL DATA	CÓDIGO	RANGO DIÁMETRO	ANCURA BANDA
	CODE	RANGE Ø	BAND WIDTH
Disponible para los siguientes rangos, en diámetros no inferiores a 14 mm:	F2 W2 076.0 090.0	mm	mm
		75	9
Available for the following product ranges, for the sizes with pitch rating not inferior to 4 mm:	F2 W2 100.0 127.0	76	9
		80	9
		82	9
		89	9
		90	9
		100	9
		102	9
		104	9
		110	9
		115	9
Es responsabilidad del usuario verificar y confirmar la idoneidad del sistema conectado y su aplicación. IPL declina toda responsabilidad en caso de uso indebido de sus sistemas y cuando el montaje sea realizado por terceros.	F2 W2 130.0 190.0	118	9
		120	9
		122	9
		125	9
		127	9
		130	9
		140	9
		150	9
		152	9
		160	9
		165	9
		It is responsibility of the user verify and confirm the suitability of the assembled system and relative application. IPL declines any responsibility for a misapplication of its assembled systems and where its hoses have been fitted by third parties.	F2 W2 200.0 230.0
175	9		
180	9		
182	9		
200	9		
203	9		
205	9		
206	9		
210	9		
220	9		
225	9		
228	9		

*Disponible bajo pedido, para cantidades a convenir con el departamento de ventas.

*Available on request, contact our sales office for more info and quantities.

Los datos técnicos indicados se midieron a 23°C y 50% de humedad.

The technical data here reported have been measured at 23°C with 50% humidity.