

SATURNO YELLOW



IT Tubo giallo trasparente in PVC-P con spirale di rinforzo in PVC rigido antiurto di colore avorio. Superficie interna completamente liscia, esterna semi liscia. Maneggevole, leggero e flessibile. Resiste a carichi, ozono, agenti atmosferici e a molti prodotti chimici. Idoneo al trasporto di liquidi alimentari, secondo UE 10/2011 (classi A, B, C).


• Per irrigazione; in agricoltura, impiegato per aspirazione e mandata di liquidi, concimi e soluzioni comunemente utilizzate nel settore; aspirazione e mandata di liquidi alimentari. Viene impiegato su carri botte e nel settore nautico come tubo per trasporto liquidi su pompa di sentina

EN Transparent yellow PVC-P hose reinforced with an ivory anti-shock rigid PVC spiral. Inside surface smooth, light corrugation outside. Strong and flexible, resistant to crushing, weathering and to most chemicals. Suitable for suction and delivery of food liquids, according to EU 10/2011 (classes A, B, C).

• Excellent in agriculture, for irrigation and suction of liquids, fertilizers and solutions used in agriculture. It is used on tank trucks; in the marine industry, as liquid transfer hose on bilge pumps.

Tubo in PVC-P
PVC-P hose

COD. SY
Ø mm 19-200

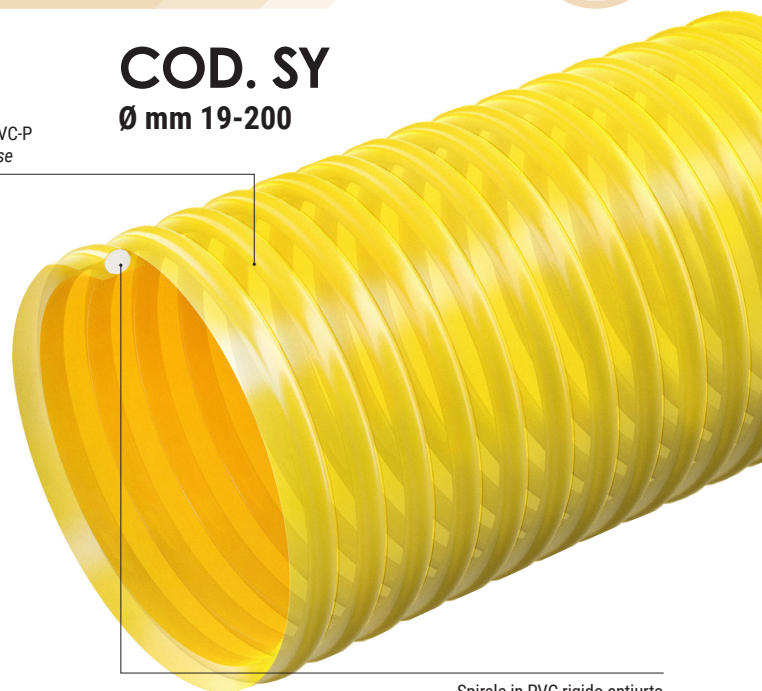

Spirale in PVC rigido antiurto
Anti-shock rigid PVC spiral



SCHEMA TECNICA - TECHNICAL DATA		CODICE	Ø INT.	SPESS. MIN.	SPESS. MAX.	PESO	P.E.	P.S.	DEPR.	R. CURVATURA	LG. ROTOLO	VOLUME
		CODE	Ø INT.	MIN WALL TH.	MAX WALL TH.	WEIGHT	W.P.	B.P.	VACUUM	BENDING	COIL LGTH.	VOLUME
			mm	mm	mm	g/m	bar	bar	m H ₂ O	mm	m	m ³
		SY010190000000*	19,1	2,2	2,9	200	5	15	6	110	50	0,046
		SY010200000000*	20	2,2	2,9	210	5	15	6	110	50	0,048
		SY010220000000*	22	2,3	3	240	5	15	6	130	50	0,061
		SY010250000000*	25	2,3	3	270	5	15	6	140	50	0,078
		SY010255000000*	25,5	2,3	3	280	5	15	6	140	50	0,079
		SY010300000000*	30	2,3	3,1	330	5	15	6	170	50	0,116
		SY010320000000*	31,8	2,4	3,2	360	5	15	6	180	50	0,122
		SY010325000000*	32,5	2,4	3,2	370	5	15	6	180	50	0,124
		SY010350000000*	35	2,5	3,3	410	5	15	6	195	50	0,133
		SY010380000000*	38,1	2,6	3,4	460	5	15	6	210	50	0,172
		SY010390000000*	39	2,6	3,4	470	5	15	6	215	50	0,176
		SY010400000000*	40	2,6	3,5	490	5	15	6	220	50	0,180
		SY010450000000*	45	2,7	3,6	570	5	15	6	250	50	0,234
		SY010500000000*	50	3	4	710	5	15	6	270	50	0,251
		SY010520000000*	50,8	3	4	720	5	15	6	270	50	0,254
		SY010550000000*	55	3	4	780	5	15	6	310	50	0,363
		SY010570000000*	57	3	4	800	5	15	6	310	50	0,374
		SY010600000000*	60	3	4,2	870	5	15	6	330	50	0,394
		SY010630000000*	63,5	3	4,2	920	5	15	6	350	50	0,414
		SY010650000000*	65	3,1	4,3	970	5	15	6	360	50	0,636
SY010700000000*	70	3,2	4,5	1050	4	12	6	450	50	0,683		
SY010750000000*	75	3,3	4,6	1160	4	12	6	500	50	0,727		
SY010760000000*	76,2	3,3	4,6	1180	4	12	6	500	50	0,738		
SY010800000000*	80	3,6	5	1350	4	12	6	550	50	0,778		
SY010900000000*	90	4,2	6	1870	3	9	6	630	30	0,588		
SY011000000000*	100	4,6	6,4	2210	3	9	6	710	30	0,866		
SY011020000000*	102	4,6	6,4	2250	3	9	6	710	30	0,882		
SY011100000000*	110	5	6,7	2560	3	9	6	720	30	1,264		
SY011200000000*	120	5	6,8	2810	3	9	6	730	30	1,368		
SY011270000000*	127	5,1	6,9	3030	3	9	6	740	30	1,442		
SY011500000000*	151,5	5,9	7,8	4160	3	9	6	800	20	1,337		
SY011520000000*	152,4	5,9	7,8	4180	3	9	6	800	20	1,344		
SY012000000000*	200	6,5	10	6510	2	6	4,5	1000	10	1,76		

*Disponibile su richiesta, per quantitativi da concordare con l'ufficio vendite.

*Available on request, contact our sales office for more info and quantities.

I dati tecnici riportati sono stati misurati a 23°C e al 50% di umidità.

The technical data here reported have been measured at 23°C with 50% humidity.