

IT Tubo di colore nero con striscia esterna identificativa marrone, strato interno in lega speciale PVC/NBR, rinforzato con spirale in acciaio armonico ed inserzione tessile in fibra di poliestere. La cordicella di rame incorporata fra i due strati rende il tubo conduttivo (R<10² Ohm/m). Superficie interna ed esterna lisce, per ridurre l'eventuale accumulo di residui durante l'impiego. Molto flessibile, anche alle basse temperature. Resiste bene ad invecchiamento, abrasione, agenti atmosferici e ozono.

• Aspirazione e mandata di olii minerali, lubrificanti, carburanti grezzi (nafta, gasolio) biodisel e come linea di ritorno sui circuiti idraulici.

EN Black hose with a brown stripe on the cover: inner layer made with a special blend of PVC/NBR, reinforced both by a harmonic steel wire and polyester yarn.

The copper wire between the two layers makes the hose conductive (R<10² Ohm/m). Liner and cover completely smooth, to reduce friction and dirt collection while using it. Very flexible even at low temperatures, resistant to abrasion, ageing, weathering and ozone.


• Suction and delivery of mineral oils, lubricants, crude fuel (naphta, diesel oil), biodisel and as a return line in hydraulic systems.

PLUTONE PRESS OIL

COD. PH · Ø mm 20-102



Spirale in acciaio
Steel spiral

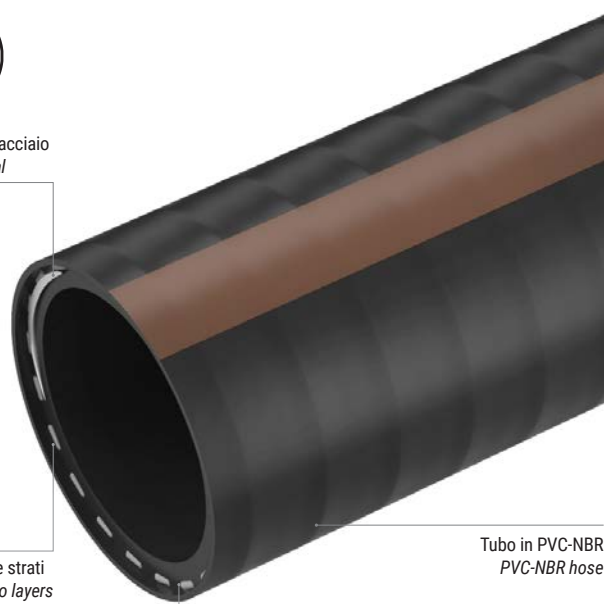


Tubo in PVC-NBR
PVC-NBR hose

Cordicella di rame incorporata fra i due strati
Copper wire embedded between the two layers

Rinforzo tessile in fibra di poliestere
Polyester yarn reinforcement



ARTICOLI DELLA STESSA SERIE · ITEMS IN THE SAME SERIES



PLUTONE PRESS CHEMICAL

SCHEDA TECNICA · TECHNICAL DATA

JP = Just pick, in stock



PLUTONE PRESS OIL	Ø int.	Ø est /out	Peso Weight	P.E. W.P.	P.S. B.P.	Depr. Vacuum	R. curvatura Bending r.	Lg. Rotolo Coil lgth.	Volume	Disponibilità Availability
CODICE/CODE	mm	mm	g/m	bar	bar	m H ₂ O	mm	m	m ³	
PH010200029000*	20	29	470	14	42	10	60	60	0,106	su richiesta/on request*
PH010250035000	25	35	650	12	36	10	80	60	0,146	in stock
PH010300040000*	30	40	760	11	33	9	90	60	0,181	su richiesta/on request*
PH010320043000*	32	43	885	11	33	9	100	60	0,214	su richiesta/on request*
PH010350046000*	35	46	955	10	30	9	110	60	0,225	su richiesta/on request*
PH010380049000*	38	49	1025	10	30	9	110	30	0,198	su richiesta/on request*
PH010400053000*	40	53	1275	10	30	9	120	30	0,207	su richiesta/on request*
PH010450058000*	45	58	1500	9	27	8	140	30	0,241	su richiesta/on request*
PH010500063000	50	63	1645	8	24	8	150	30	0,286	✓
PH010520065000*	52	65	1705	8	24	8	160	30	0,291	su richiesta/on request*
PH010600074000*	60	74	2070	7	21	8	180	30	0,365	su richiesta/on request*
PH010630077000*	63	77	2165	7	21	8	190	30	0,379	su richiesta/on request*
PH010760091000*	76	91	2705	6	18	7	230	30	0,604	su richiesta/on request*
PH010800095000*	80	95	2805	6	18	7	240	20	0,498	su richiesta/on request*
PH010900106000*	90	106	3415	5	15	7	270	20	0,760	su richiesta/on request*
PH011020118000*	102	118	3830	4	12	7	310	20	0,801	su richiesta/on request*

* Diametri su richiesta per quantitativi minimi (MOQ), salvo disponibilità a magazzino · * Diameters available on request for minimum order quantities (MOQ), unless in stock

I dati tecnici riportati sono stati misurati a 23°C e al 50% di umidità
The technical data here reported have been measured at 23°C with 50% humidity