

**ES** Espiral de PVC rígido ( de color rojo), especialmente diseñada para adaptarse entre las espirales de refuerzo de la manguera, siguiendo su paso. El montaje es rápido y sencillo, gracias a que la abrazadera descansa sobre una superficie lisa.


• Aplicaciones: Se utiliza en mangueras de la serie Spiralpress, con cód. SC EN, para mangueras spiralpress ENO, spiralpress WT y spiralpress OIL.

**EN** Red rigid PVC banding coil, specially designed to fit into the area between the reinforcing spirals of the hose, following its pitch. As a result, fitting is quicker and easier, as the band rests on a smooth surface.

• Used on Spiralpress series hoses and available on the whole diameter range.

# ESPIRAL BANDING COIL

**CÓD. SC EN Ø mm 38-254**

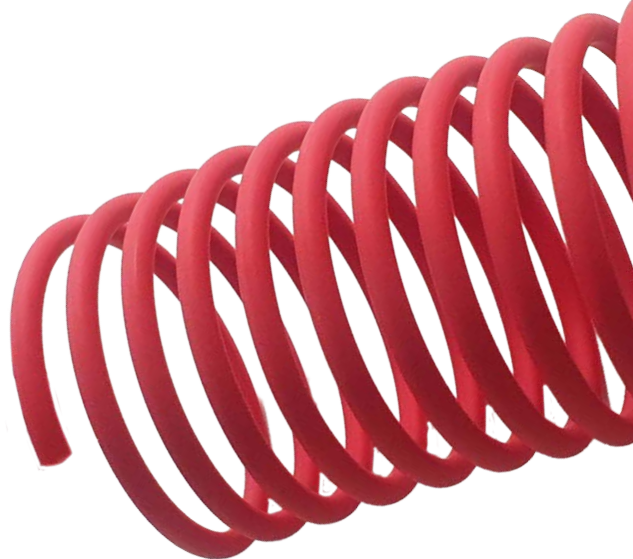

## FICHA TÉCNICA · TECHNICAL DATA

| ESPIRAL<br>BANDING COIL | Ø INT. |        | Peso/Weight | Lg./Lgth. |
|-------------------------|--------|--------|-------------|-----------|
| CÓDIGO/CODE             | mm     | INCHES | g/m         | mm        |
| SCEN0380000000          | 38,1   | 1 1/2  | 310         | 153       |
| SCEN0400000000          | 40     |        | 305         | 152       |
| SCEN0500000000          | 50     |        | 470         | 180       |
| SCEN0508000000          | 50,8   | 2      | 475         | 180       |
| SCEN0600000000          | 60     |        | 505         | 203       |
| SCEN0760000000          | 76,2   | 3      | 835         | 225       |
| SCEN0800000000          | 80     |        | 1050        | 225       |
| SCEN1000000000          | 100    |        | 1200        | 240       |
| SCEN1020000000          | 101,6  | 4      | 1255        | 240       |
| SCEN1270000000          | 127    | 5      | 1460        | 292,5     |
| SCEN1520000000          | 152,4  | 6      | 2170        | 322,5     |
| SCEN2030000000          | 203,2  | 8      | 3455        | 375       |
| SCEN2540000000          | 254    | 10     | 4475        | 405       |

Los datos técnicos indicados se han medido a 23 °C y con una humedad del 50%. The technical data here reported have been measured at 23°C with 50% umidity.  
\*Disponibile su richiesta, per quantitativi da concordare con l'ufficio vendite. \*Available on request, contact our sales office for more info and quantities.