

IT Tubo trasparente in speciale PVC-P appositamente studiato per il settore vinicolo, con spirale in PVC rigido antiurto color rosso e rinforzo tessile in fibra di poliestere. Parete e spirale di grado alimentare. Grazie al rinforzo tessile ad alta tenacità, esso presenta una buona resistenza a pressioni elevate senza deformazioni; la spirale sporgente facilita le operazioni di scorrimento sul suolo. Idoneo al contatto alimenti secondo UE 10/2011 (classi A,B,C, D1). Spirulina disponibile su richiesta su tutta la gamma diametri (cod. SC EN).

• Trasporto in aspirazione e mandata di bevande, vini e vinacce con concentrazione alcolica fino al 50%.


EN Transparent PVC-P hose, reinforced with a red anti-shock rigid PVC spiral and polyester yarn. Food grade wall and hard plastic spiral. Specially conceived for the wine industry and where a good resistance at high pressures without elongation is required, thanks to its high tenacity textile reinforcement. The exposed PVC corrugated helix allows less resistance to dragging. Food grade hose wall and spiral. Food grade, according to EU 10/2011 (classes A, B, C, D1). Banding coil available on request, throughout the diameter range (Code SC EN).

• Suction and delivery of beverages and wines with alcohol content up to 50%.



SPIRALPRESS ENO

COD. BS EN · Ø mm 38,1-254

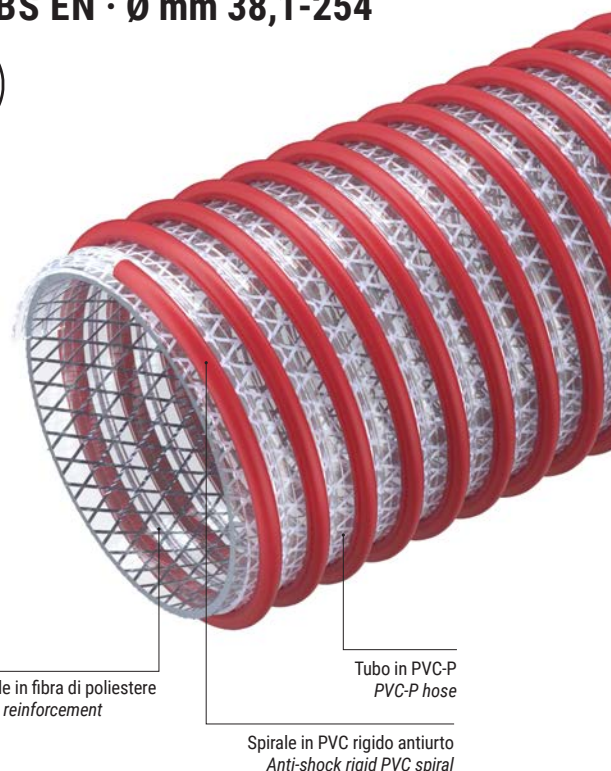


Rinforzo tessile in fibra di poliestere
Polyester yarn reinforcement

Tubo in PVC-P
PVC-P hose

Spirale in PVC rigido antiurto
Anti-shock rigid PVC spiral

ARTICOLI DELLA STESSA SERIE · ITEMS IN THE SAME SERIES



SPIRALPRESS WT



SPIRALPRESS OIL



SPIRALPRESS MILK

SCHEDA TECNICA · TECHNICAL DATA

SPIRALPRESS ENO	Ø int.		Spess min Min wall thick	Spess max max wall thick	Peso Weight	P.E. W.P.	P.S. B.P.	Depr./ Vacuum	R. curvatura Bending r.	Lg. Rotolo Coil lgth.	Volume	Disponibilità Availability
CODICE/CODE	mm	inches	mm	mm	g/m	bar	bar	m H ₂ O	mm	m	m ³	
BSEN0380000000*	38,1	1 1/2	3	7,1	790	8	24	9,5	90	30	0,134	su richiesta/on request*
BSEN0400000000*	40		3	7,1	805	8	24	9,5	100	30	0,139	su richiesta/on request*
BSEN0500000000*	50		3	7,7	1085	7	21	9,5	160	30	0,251	su richiesta/on request*
BSEN0508000000*	50,8	2	3	7,7	1100	7	21	9,5	160	30	0,254	su richiesta/on request*
BSEN0600000000*	60		3	8,4	1235	7	21	9,5	180	30	0,332	su richiesta/on request*
BSEN0760000000*	76,2	3	3,5	9,8	1905	6	18	9	200	30	0,414	su richiesta/on request*
BSEN0800000000*	80		3,5	10,4	2185	6	18	9	210	30	0,581	su richiesta/on request*
BSEN1000000000*	100		3,5	10,4	2585	6	18	9	300	30	0,928	su richiesta/on request*
BSEN1020000000*	101,6	4	3,5	10,5	2660	6	18	9	300	30	0,942	su richiesta/on request*
BSEN1270000000*	127	5	5	12,5	3975	5	15	9	380	30	1,556	su richiesta/on request*
BSEN1520000000*	152,4	6	5	13,8	5235	5	15	8	450	20	1,440	su richiesta/on request*
BSEN2030000000	203,2	8	6	16,4	8255	4	12	8	600	10	1,888	✓
BSEN2540000000*	254,0	10	9	20	11325	3	-	6	-	10 m dritti/10 m straight	0,638	su richiesta/on request*

* Diametri su richiesta per quantitativi minimi (MOQ), salvo disponibilità a magazzino · * Diameters available on request for minimum order quantities (MOQ), unless in stock

I dati tecnici riportati sono stati misurati a 23°C e al 50% di umidità
The technical data here reported have been measured at 23°C with 50% humidity