ARIANNA BIO

CÓD. B1 · Ø mm 6-50

ES **Tubo transparente fabricado con un Bio-compound especial, obtenido a partir de fuentes naturales renovables, con refuerzo textil de fibra de poliéster.** Resistente a los agentes atmosféricos y a numerosos productos químicos. Certificado para el transporte de alimentos, leche y productos lácteos, según la normativa UE 10/2011 (clases A, B, C y D1) y según la FDA CFR 21 Item 176.170.
• Solución ideal para el transporte de líquidos alimentarios, bebidas, zumos de frutas, vinagre, vino y licores con una concentración alcohólica de hasta el 50%. Se utiliza a menudo en máquinas llenadoras y dosificadoras. En agricultura, se utiliza para riego.

EN **Transparent hose produced with a special bio-based compound, obtained from natural sources and reinforced with a polyester yarn.** Resistant to several chemicals and to weathering. Food grade, according to EU 10/2011 (classes A, B, C, D1) and to FDA CFR 21 Item 176.170.
• Ideal solution for delivery of food liquids, beverages, fruit juices, wine and liquors with up to 50% alcohol content, as well as milk and by-products. It is often used for filling machines and dispensers. in agriculture, used for irrigation.

+60°C
-10°C

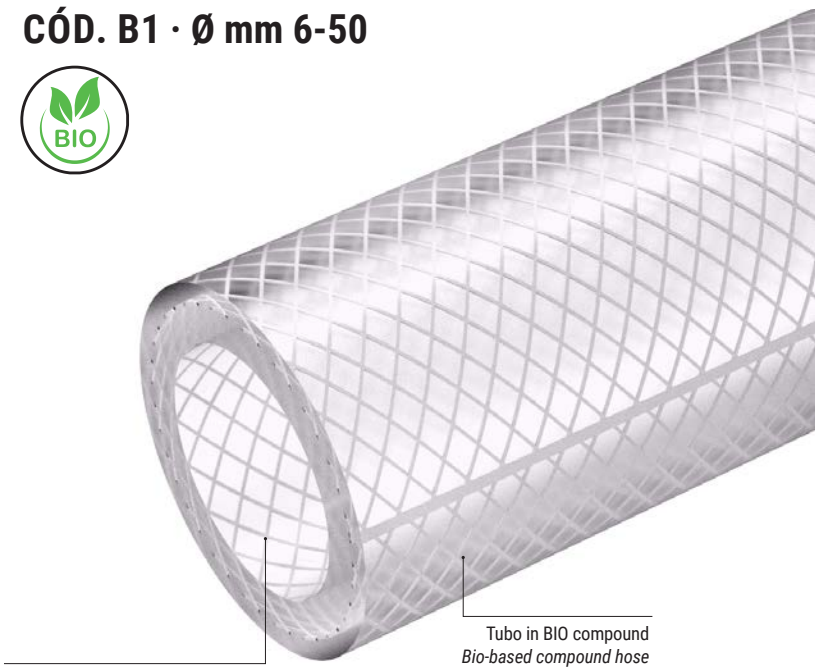

ARTÍCULOS DE LA MISMA SERIE • ITEMS IN THE SAME SERIES


PLUTONE PRESS BIO


PLUTONE BIO

FICHA TÉCNICA · TECHNICAL DATA

JP = Just pick, en stock

ARIANNA BIO	ø int.	ø ext out	Peso Weight	P.T. W.P.	P.R. B.P.	R. de curvatura Bending r.	Lg. Rollo Coil lgth.	Volume	Disponibilidad Availability
CÓDIGO/CODE	mm	mm	g/m	bar	bar	mm	m	m^3	
B1010060011000*	6	11	85	21	63	30	100	0,023	bajo pedido/on request*
B1010060012000	6	12	105	21	63	30	100	0,025	✓
B1010080013000*	8	13	105	23	69	40	100	0,028	bajo pedido/on request*
B1010080014000	8	14	130	23	69	40	100	0,032	✓
B1010090015000*	9	15	140	19	57	50	100	0,036	bajo pedido/on request*
B1010100015000*	10	15	120	16	48	50	100	0,036	bajo pedido/on request*
B1010100016000	10	16	150	16	48	50	100	0,041	en stock
B1010120017000*	12	17	140	12	36	60	100	0,044	bajo pedido/on request*
B1010120018000	12	18	175	12	36	60	100	0,050	en stock
B1010125018500*	12,5	18,5	180	12	36	60	100	0,051	bajo pedido/on request*
B1010130018000*	13	18	150	11	33	70	100	0,050	bajo pedido/on request*
B1010130019000	13	19	185	11	33	70	100	0,058	en stock
B1010150020000*	15	20	170	11	33	80	50	0,034	bajo pedido/on request*
B1010150021000*	15	21	210	11	33	80	50	0,035	bajo pedido/on request*
B1010160021000*	16	21	180	10	30	80	50	0,035	bajo pedido/on request*
B1010160022000	16	22	220	10	30	80	50	0,041	en stock
B1010190025000*	19	25	255	9	27	100	50	0,083	bajo pedido/on request*
B1010190026000	19	26	305	9	27	100	50	0,085	en stock
B1010250032000*	25	32	385	8	24	130	50	0,099	bajo pedido/on request*
B1010250033000	25	33	450	8	24	130	50	0,102	en stock
B1010300038000	30	38	525	6	18	150	50	0,141	✓
B1010320041000*	32	41	635	5	15	160	50	0,165	bajo pedido/on request*
B1010320042000	32	42	710	5	15	160	50	0,168	✓
B1010380048000	38	48	825	4	12	190	50	0,271	✓
B1010400050000	40	50	865	4	12	200	50	0,303	✓
B1010500062000	50	62	1290	4	12	250	50	0,391	en stock

*** Diámetros bajo pedido para cantidades mínimas (MOQ), según disponibilidad en almacén · * Diameters available on request for minimum order quantities (MOQ), unless in stock**

Los datos técnicos indicados se han medido a 23 °C y con una humedad del 50%
The technical data here reported have been measured at 23°C with 50% humidity

IPL se reserva el derecho de realizar modificaciones en la información aquí contenida y/o suspender un producto sin previo aviso
We reserve the right either to alter specifications and discontinue products without prior notice